

Features

- 1500 Watts Peak Pulse Power per Line ($t_p = 8/20\mu s$)
- Replacement for MLV (0805)
- Protects one I/O or power line
- Low Clamping Voltage
- Working Voltage: 4.5 V
- Low Leakage Current
- Response Time is Typically < 1 ns



IEC COMPATIBILITY (EN61000-4)

- IEC 61000-4-2 (ESD) $\pm 30kV$ (air), $\pm 30kV$ (contact)
- IEC 61000-4-4 (EFT) 40A (5/50ns)
- IEC 61000-4-5 (Lightning) 100A (8/20 μs)


Mechanical Characteristics

- JEDEC SOD-323F package
- Molding compound flammability rating:
UL 94V-0
- Packaging : Tape and Reel per EIA 481
- RoHS Compliant

Applications

- Laptop Computers
- Cellular Phones
- Digital Cameras
- Personal Digital Assistants (PDAs)

Schematic & PIN Configuration

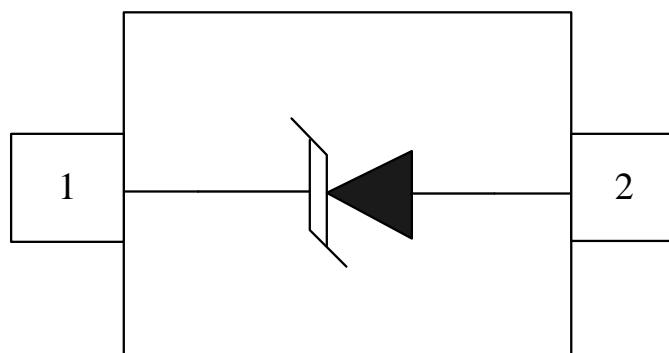


SOD-323F (Top View)

Absolute Maximum Rating

| Rating | Symbol | Value | Units |
|--|-----------|-------------|-------|
| Peak Pulse Power ($t_p = 8/20\mu s$) | P_{PP} | 1500 | Watts |
| Maximum Peak Pulse Current ($t_p = 8/20\mu s$) | I_{PP} | 100 | A |
| Operating Temperature | T_J | -55 to +125 | °C |
| Storage Temperature | T_{STG} | -55 to +150 | °C |

Electrical Parameters ($T=25^\circ C$)

| Symbol | Parameter |
|-----------|-------------------------------------|
| I_{PP} | Reverse Peak Pulse Current |
| V_C | Clamping Voltage @ I_{PP} |
| V_{RWM} | Working Peak Reverse Voltage |
| I_R | Reverse Leakage Current @ V_{RWM} |
| V_{BR} | Breakdown Voltage @ I_T |
| I_T | Test Current |
| I_F | Forward Current |
| V_F | Forward Voltage @ I_F |

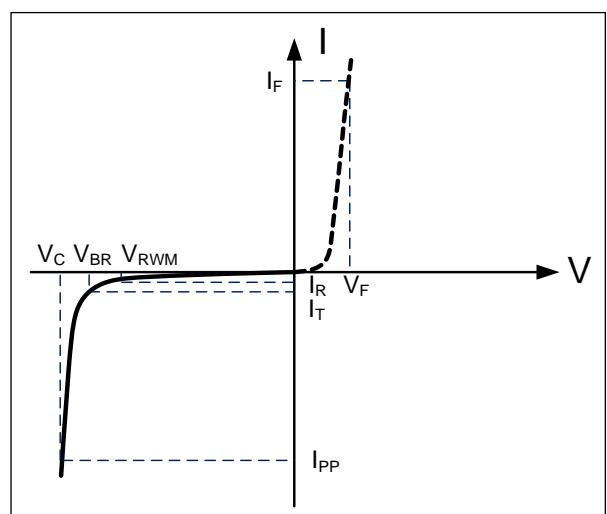

Electrical Characteristics

| DW4.5D3HP-S | | | | | | |
|---------------------------|-----------|------------------------------|---------|---------|---------|---------|
| Parameter | Symbol | Conditions | Minimum | Typical | Maximum | Units |
| Forward Voltage | V_F | $I_F=1mA$ | | 0.7 | | V |
| Reverse Stand-Off Voltage | V_{RWM} | | | | 4.5 | V |
| Reverse Breakdown Voltage | V_{BR} | $I_T=1mA$ | 5 | | 7 | V |
| Reverse Leakage Current | I_R | $V_{RWM}=4.5V, T=25^\circ C$ | | | 0.5 | μA |
| Clamping Voltage | V_C | $I_{PP}=100A, t_p=8/20\mu s$ | | | 15 | V |
| Junction Capacitance | C_j | $V_R=0V, f=1MHz$ | | 700 | | pF |

Typical Characteristics

Figure 1: Peak Pulse Power vs. Pulse Time

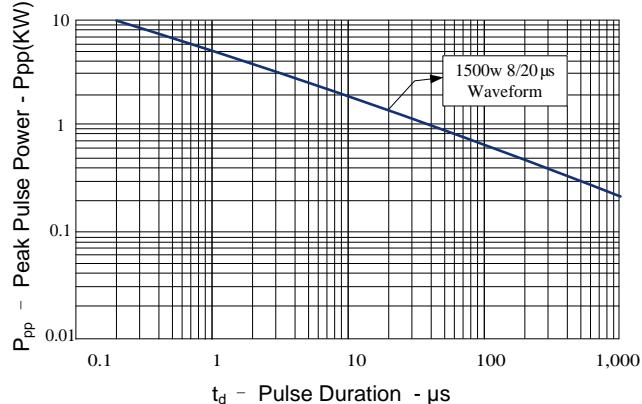


Figure 2: Power Derating Curve

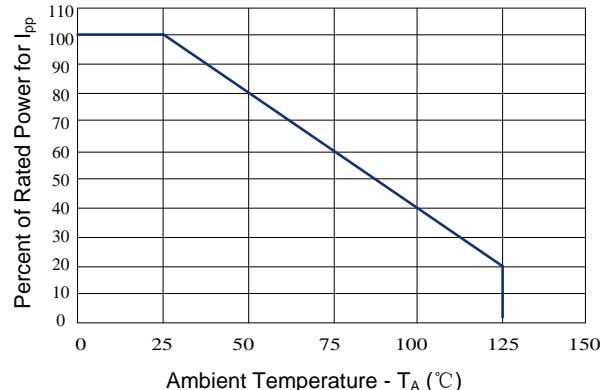


Figure 3: Clamping Voltage vs. Peak Pulse Current

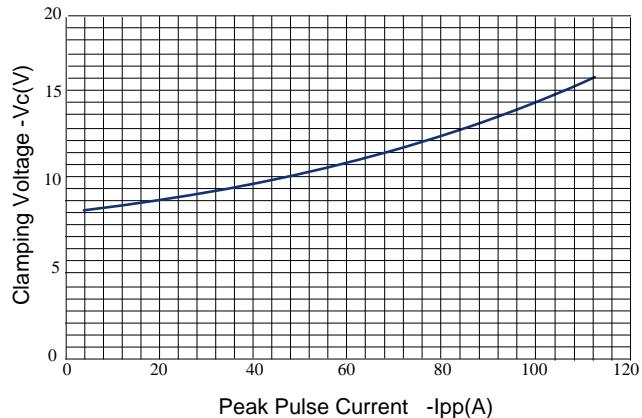


Figure 4: Normalized Junction Capacitance vs. Reverse Voltage



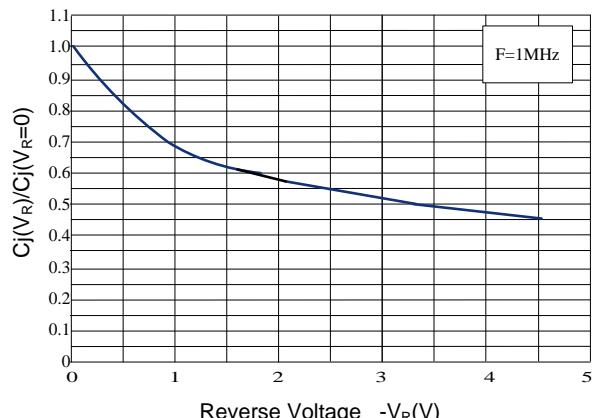


Figure 5: 8/20μs Pulse Waveform

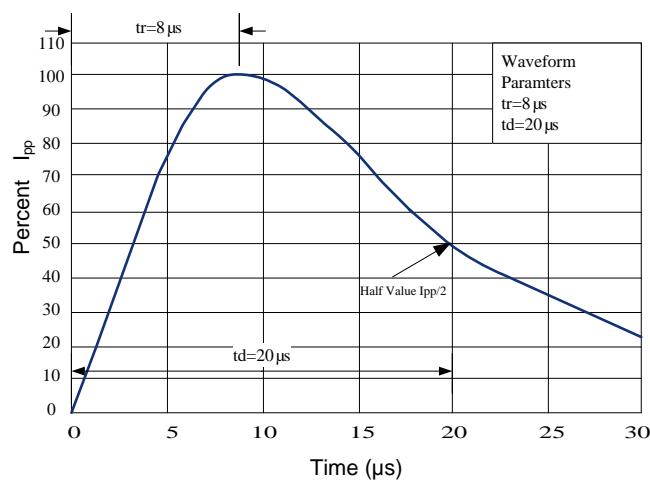

Outline Drawing – SOD-323F

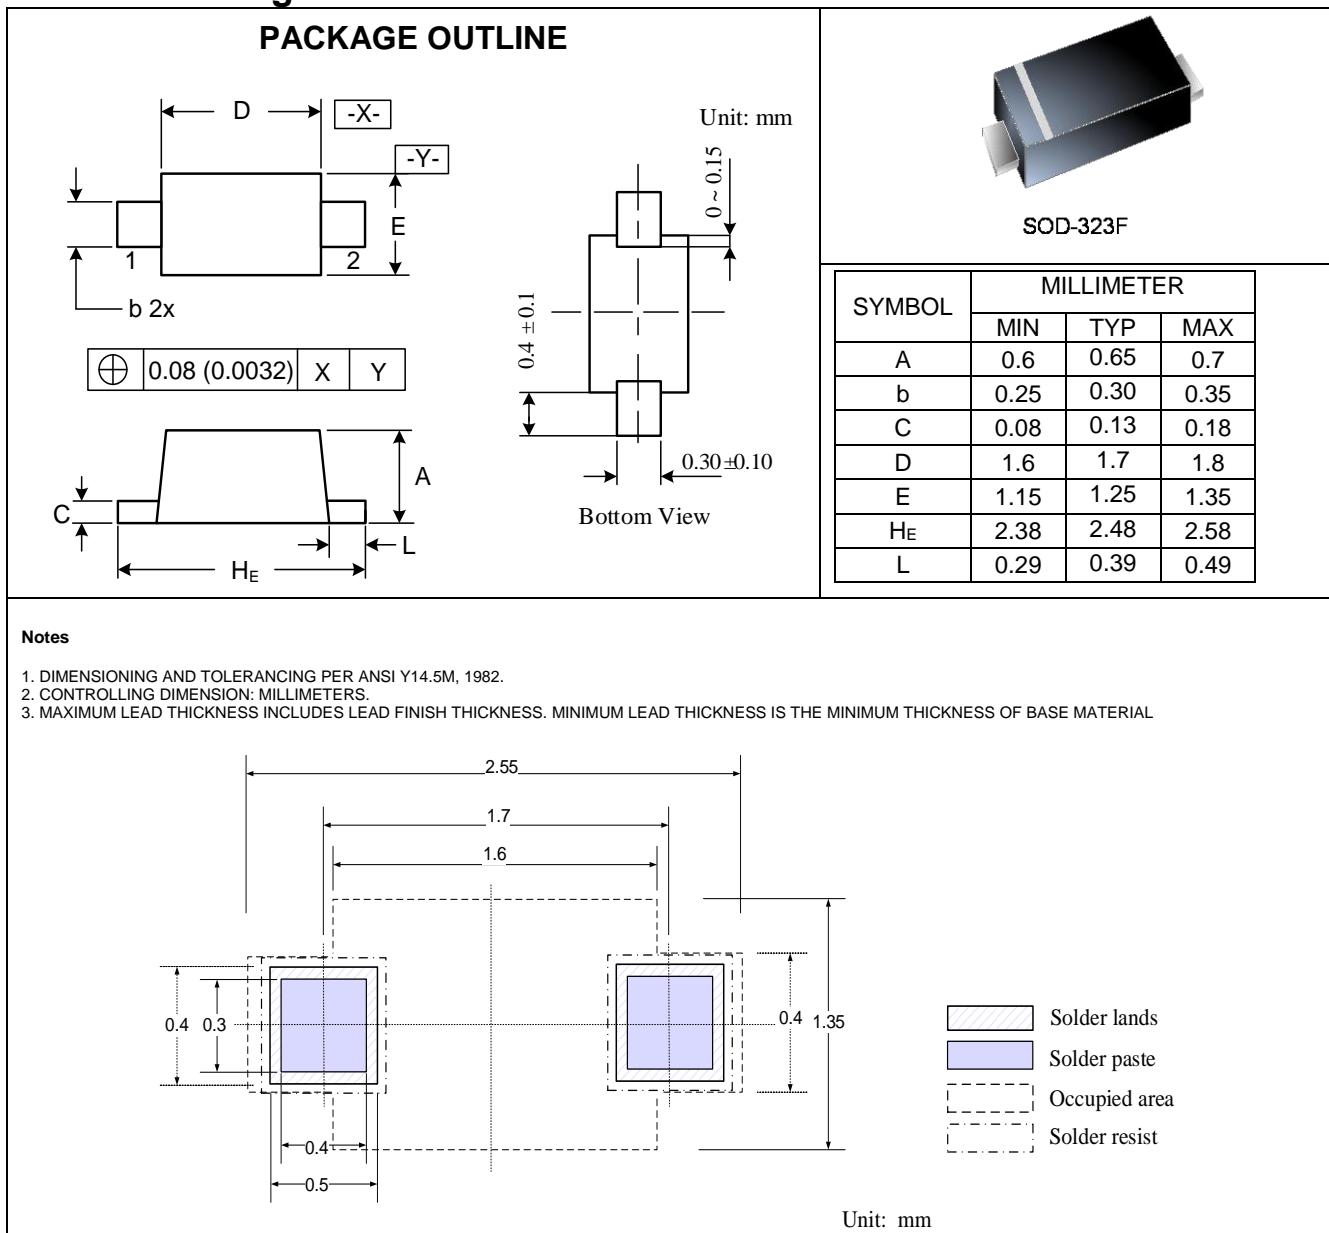

Marking Codes



Package Information

Qty: 3k/Reel