



Ultrafast Recovery Rectifier

Reverse Voltage 1200V Forward Current 1.0 A


DO-214AC (SMA)

Features

- Glass passivated junction chip
- For surface mounted application
- Solder dip 260°C, 10s
- Built-in strain relief, ideal for automated placement
- Fast switching for high efficiency
- Halogen-free according to IEC 61249-2-21 definition
- Plastic package has Underwriters Laboratory Flammability Classification 94V-0

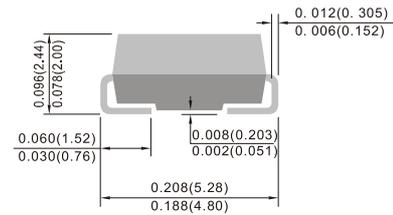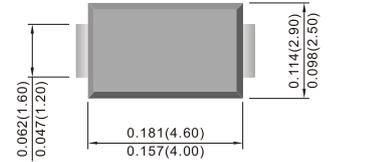

Unit : inch(mm)



Typical Applications

For use of general purpose rectification in lighting, cellular phone, portable device, power suppliers and other consumer applications.

Absolute Maximum Ratings ($T_A=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Value	Unit
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	1200	V
Maximum RMS Voltage	V_{RMS}	840	V
Maximum DC Blocking Voltage	V_{DC}	1200	V
Maximum Average Output Rectified Current	$I_{F(AV)}$	1	A
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Superimposed on Rated Load	I_{FSM}	30	A
Rating for Fusing ($t < 8.3\text{ms}$)	I^2t	3.7	A^2sec
Typical Thermal Resistance ¹	$R_{\theta JA}$	90	$^\circ\text{C}/\text{W}$
	$R_{\theta JC}$	20	$^\circ\text{C}/\text{W}$
	$R_{\theta JL}$	25	$^\circ\text{C}/\text{W}$
Operating Junction Temperature Range	T_J	-55 to +150	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 to +150	$^\circ\text{C}$

Electrical Characteristics ($T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Conditions	Value	Unit
Maximum Instantaneous Forward Voltage	V_F	$I_F=1.0\text{A}$, $T_A=25^\circ\text{C}$	1.9	V
Maximum DC Reverse Current at Rated DC Blocking Voltage	I_R	$T_A=25^\circ\text{C}$	5	μA
		$T_A=125^\circ\text{C}$	100	
Maximum Reverse Recovery Time	t_{rr}	$I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $I_{RR}=0.25\text{A}$	75	nS
Typical Junction Capacitance	C_J	4.0V, 1MHz	6.5	pF

Notes: 1. The thermal resistance from junction to ambient, case and lead, mounted on FR-4 P.C.B with 5x5mm copper pads, 20Z.



Ratings and Characteristics Curves

($T_A = 25^\circ\text{C}$ unless otherwise noted)

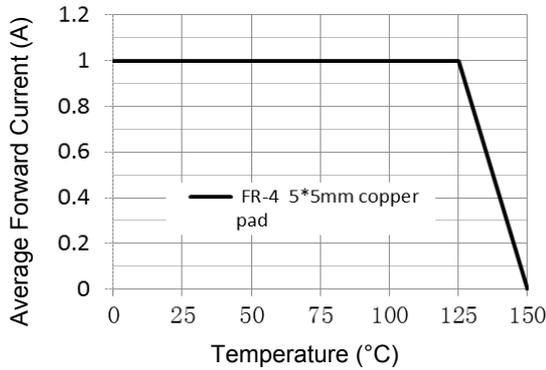


Figure 1. Forward Current Derating Curve

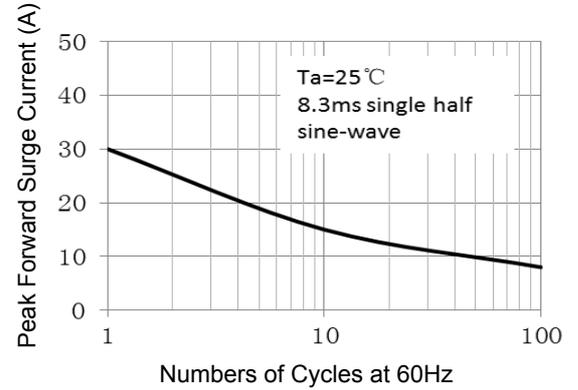


Figure 2. Maximum Non-Repetitive Peak Forward Surge Current

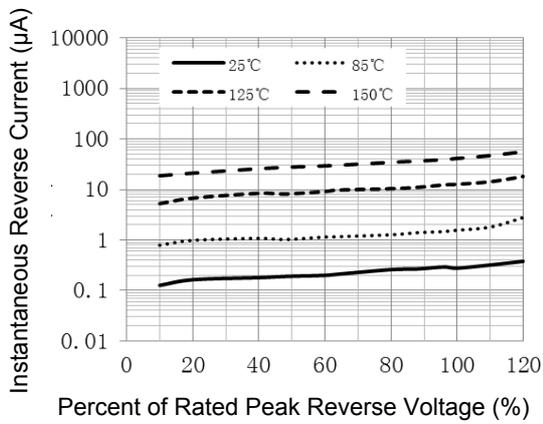


Figure 3. Typical Reverse Characteristics

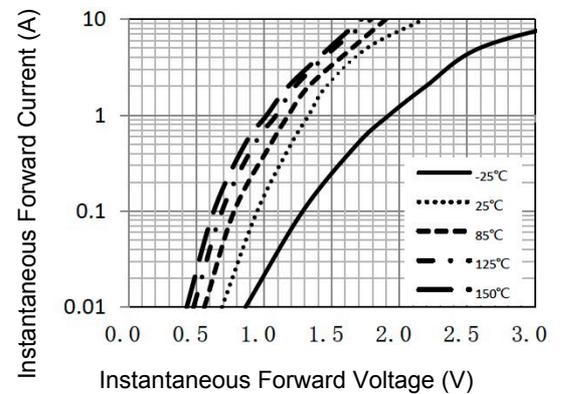


Figure 4. Typical Instantaneous Forward Characteristics

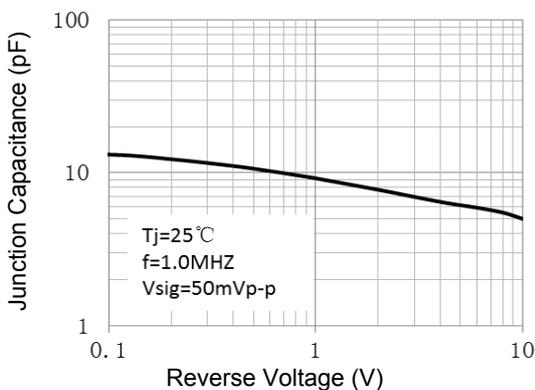


Figure 5. Typical Junction Capacitance