



Features

- Small Body Outline Dimensions:
0.063" x 0.032" (1.6x0.8 mm)
- Low Body Height: 0.024" (0.6 mm) Nom
- 400 Watts peak pulse power ($t_p = 8/20\mu s$)
- Protects one I/O or power line
- Replacement for MLV(0603)
- Low clamping voltage
- Working voltage: 5V
- Low leakage current
- Solid-state silicon-avalanche technology



SOD-523

IEC Compatibility (EN61000-4)

- IEC 61000-4-2 (ESD) ±30kV (air), ±30kV (contact)
- IEC 61000-4-4 (EFT) 40A (5/50ns)
- IEC 61000-4-5 (Lightning) 25A (8/20μs)


Mechanical Characteristics

- JEDEC SOD-523 package
- Molding compound flammability rating:
UL 94V-0
- Marking : Marking Code
- Packaging : Tape and Reel per EIA 481
- RoHS Compliant

Applications

- Cellular Handsets & Accessories
- Personal Digital Assistants (PDAs)
- Notebooks & Handhelds
- Portable Instrumentation
- Digital Cameras
- MP3 players

Schematic & PIN Configuration

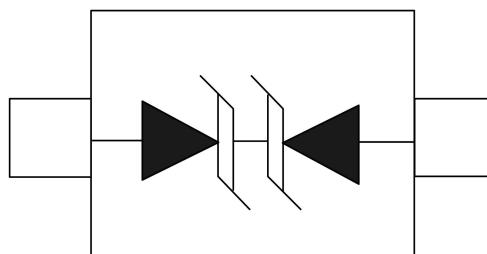

SOD-523 (Top View)




Absolute Maximum Rating

Rating	Symbol	Value	Units
Peak Pulse Power ($t_p = 8/20\mu s$)	P_{PP}	400	Watts
Maximum Peak Pulse Current ($t_p = 8/20\mu s$)	I_{PP}	25	A
Operating Temperature	T_J	-55 to +125	°C
Storage Temperature	T_{STG}	-55 to +150	°C

Electrical Parameters (T=25°C)

Symbol	Parameter
I_{PP}	Maximum Reverse Peak Pulse Current
V_C	Clamping Voltage @ I_{PP}
V_{RWM}	Working Peak Reverse Voltage
I_R	Maximum Reverse Leakage Current @ V_{RWM}
V_{BR}	Breakdown Voltage @ I_T
I_T	Test Current
I_F	Forward Current
V_F	Forward Voltage @ I_F

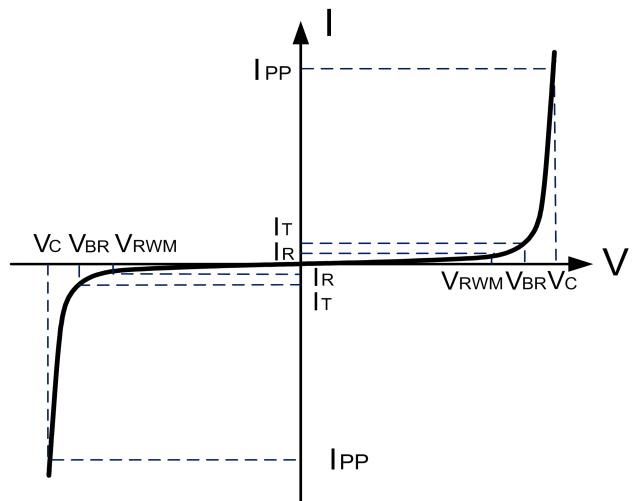

Electrical Characteristics

DW05D5-B-S						
Parameter	Symbol	Conditions	Minimum	Typical	Maximum	Units
Reverse Stand-Off Voltage	V_{RWM}				5	V
Reverse Breakdown Voltage	V_{BR}	$I_T = 1\text{mA}$	6			V
Reverse Leakage Current	I_R	$V_{RWM}=5\text{V}, T=25^\circ\text{C}$			1	μA
Clamping Voltage	V_C	$I_{PP}=25\text{A}, t_p=8/20\mu\text{s}$			18	V
Junction Capacitance	C_j	$V_R = 0\text{V}, f = 1\text{MHz}$		30		pF



Typical Characteristics

Figure 1: Peak Pulse Power Vs Pulse Time

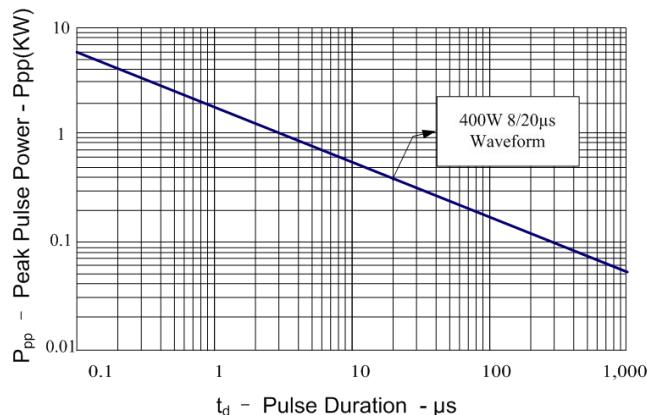


Figure 2: Power Derating Curve

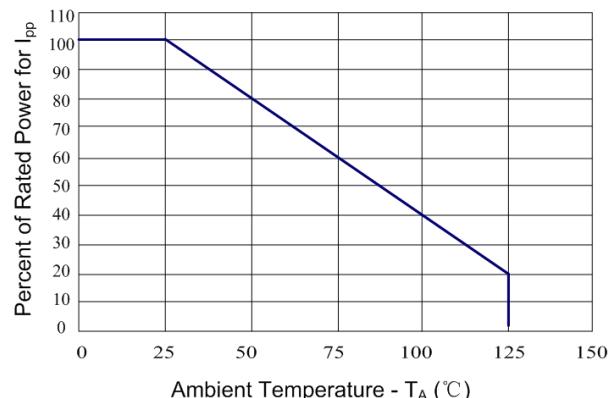


Figure 3: Clamping Voltage vs. Peak Pulse Current

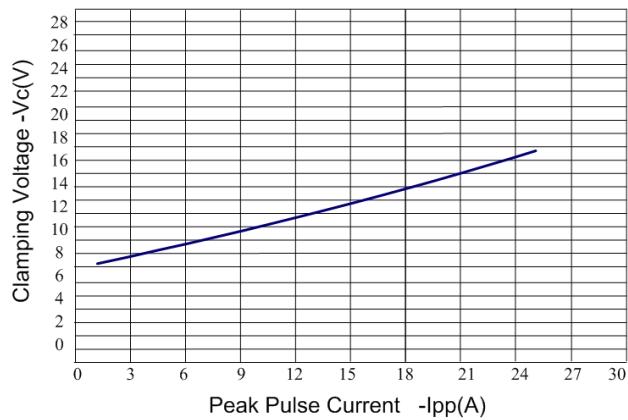


Figure 4: Normalized Junction Capacitance vs. Reverse Voltage

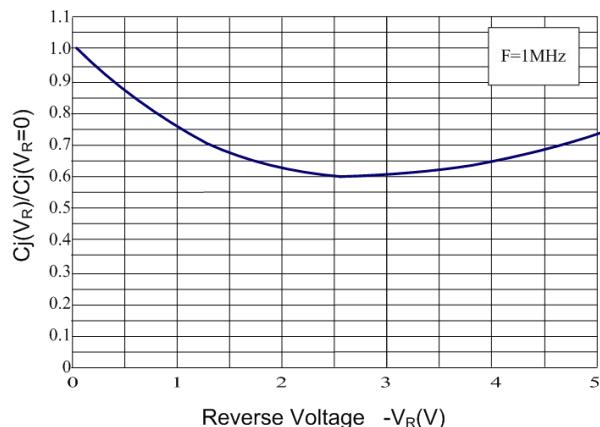


Figure 5: Pulse Waveform


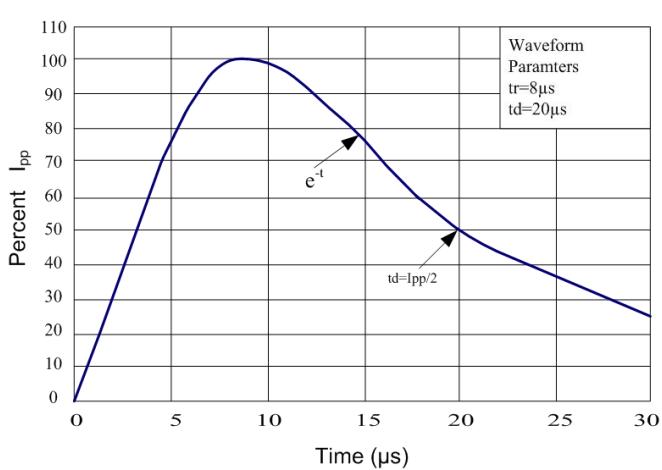


Figure 6: ESD Clamping(8kV Contact per IEC 61000-4-2)



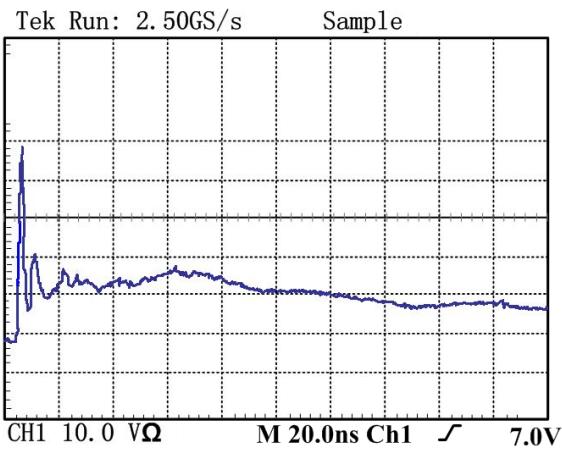

Outline Drawing – SOD-523

PACKAGE OUTLINE		SOD-523			
SYMBOL	DIMENSIONS	MILLIMETER		INCHES	
		MIN	MAX	MIN	MAX
A	0.50	0.70	0.020	0.028	
b	0.25	0.35	0.010	0.014	
C	0.07	0.20	0.0028	0.0079	
D	1.10	1.30	0.043	0.051	
E	0.70	0.90	0.028	0.035	
H _E	1.50	1.70	0.059	0.067	
L	0.15	0.25	0.006	0.010	

3D model of the SOD-523 package.

SOD-523

Front view of the SOD-523 package outline diagram showing dimensions D, E, b, A, C, H_E, L, and lead spacing.

Side view of the SOD-523 package outline diagram showing lead thickness and lead height.

PACKAGE OUTLINE

Front View:

Side View:

DIMENSIONS: MILLIMETERS

1.40
0.40
0.40

DIMENSIONS: MILLIMETERS

Notes

1. Controlling Dimensions in Millimeters.
2. Dimensions are exclusive of mold flash and metal burrs.

Marking Codes

Part Number	DW05D5-B-S
Marking Code	OC



Package Information

Qty: 5k/Reel